


# SLB700

## 700mm dia. Marker Buoy

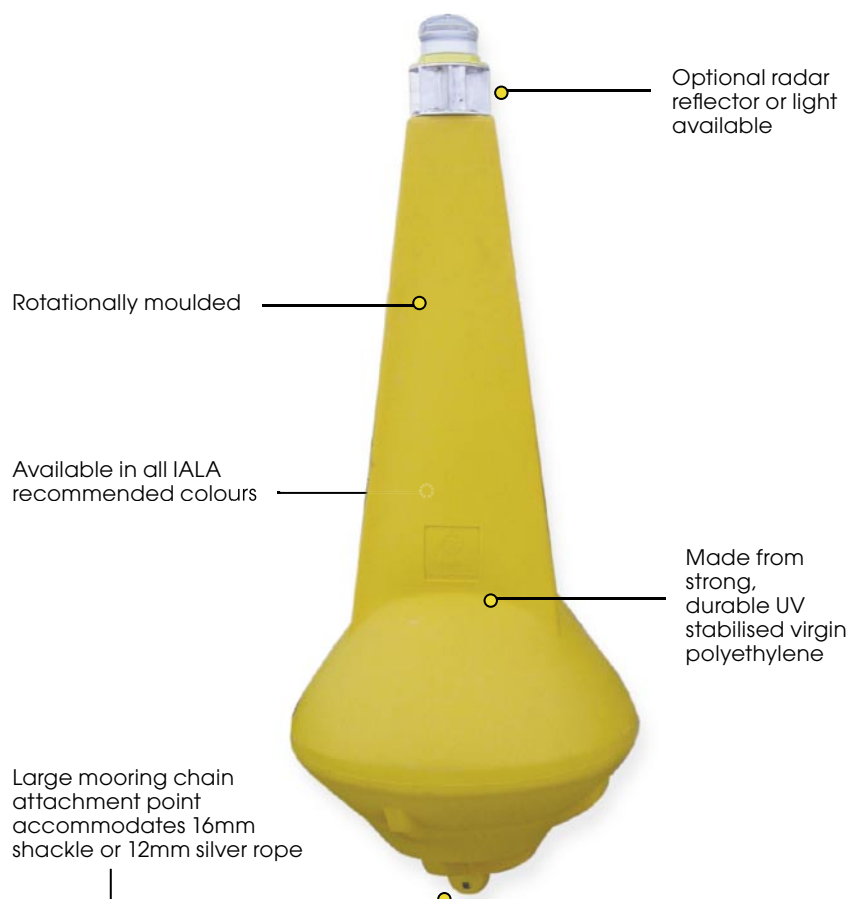

**The SLB700 is a short-range buoy ready for immediate installation. Typical applications include day and night channel, speed zone, restricted area marking and aquaculture.**

The SLB700 is extremely long-lasting, and is moulded in strong, durable UV stabilised polyethylene. The base of the buoy is steel-shot filled and the top section is polyurethane foam filled, providing excellent buoyancy and stability. A large mooring chain attachment point accommodates a 16mm shackle or 12mm silver rope.

The SLB700 incorporates an interconnected mooring and lifting eye for additional strength, and enables a wider range of installations than the smaller SLB600.

The SLB700 is substantially larger than the SLB600, with approximately twice the buoyancy. The top section of the SLB700 has 3 threaded studs, moulded into the buoy to enable easy mounting of either the SL15 1nm, or SL60 or SL70 2nm Solar Lights.

The SLB700 can be economically shipped around the globe, with approx. 105pcs and 210pcs being packed in 20ft and 40ft shipping containers respectively. Please call a Sealite sales representative for an accurate quotation on your next project.



**Head Office:**  
Sealite Pty Ltd  
AUSTRALIA



Ph. +61 3 5977 6128  
Fax. +61 3 5977 6124  
Internet: [www.sealite.com.au](http://www.sealite.com.au)  
Email: [info@sealite.com.au](mailto:info@sealite.com.au)

**USA Customers:**  
Sealite USA  
USA (Gilford, NH)

Ph. (603) 524-6066  
Fax. (603) 524-8100  
Internet: [www.sealiteusa.com](http://www.sealiteusa.com)  
Email: [info@sealiteusa.com](mailto:info@sealiteusa.com)

# SLB700

## 700mm dia. Marker Buoy

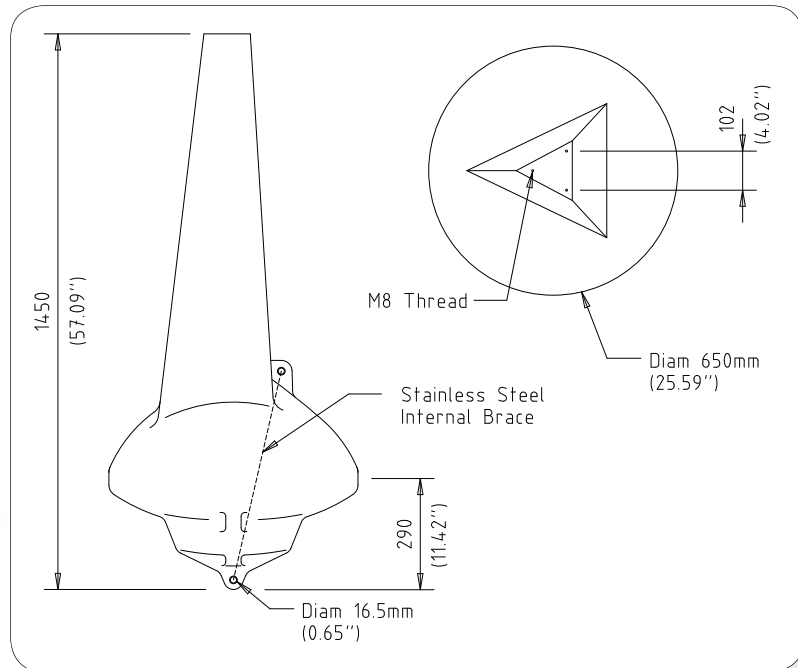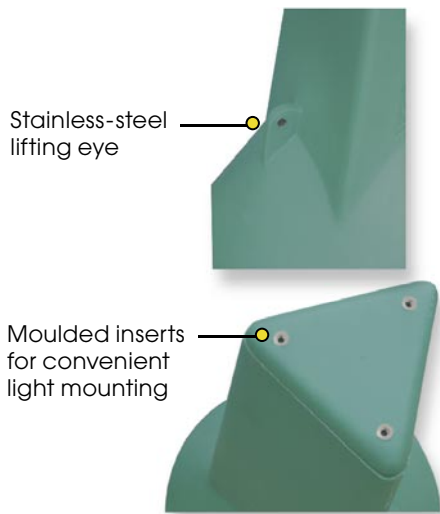

### SPECIFICATIONS •

Available Colours	Red, Green, White, Yellow as per IALA Recommendations
Focal Plane Height (mm/inches)	1265 / 49 <sup>3</sup> / <sub>4</sub>
Material	Rotationally moulded UV stabilised virgin polyethylene
Wall Thickness (mm/inches)	316-grade stainless-steel interconnected lifting and mooring eye
Ballast	6 / 1/4
Foam Filling	Internal steel-shot
Reserve Buoyancy (kg/lbs)	Closed-cell polyurethane
Draft (mm/inches)	120 / 264
Height (mm/inches)	240 / 9 1/2
Width (mm/inches)	1450 / 57 1/8
Mass (kg/lbs)	700 / 27 1/2
Quality Assurance	33 / 72 <sup>5</sup> / <sub>8</sub>
Product Life Expectancy	ISO9001:2000
Warranty	Up to 12 years
Options Available	1 year

- Sealite Lantern- SL15, SL60, SL70
- Mould-on graphics

CE

• Specifications subject to change or variation without notice

**Head Office:**  
Sealite Pty Ltd  
AUSTRALIA

Ph. +61 3 5977 6128  
Fax. +61 3 5977 6124  
Internet: [www.sealite.com.au](http://www.sealite.com.au)  
Email: [info@sealite.com.au](mailto:info@sealite.com.au)

**USA Customers:**  
Sealite USA  
USA (Gilford, NH)

Ph. (603) 524-6066  
Fax. (603) 524-8100  
Internet: [www.sealiteusa.com](http://www.sealiteusa.com)  
Email: [info@sealiteusa.com](mailto:info@sealiteusa.com)

